

**RECEIVED**  
**CENTRAL FAX CENTER**

**JUL 31 2006**


**CERTIFICATE OF VERIFICATION**

I, **David H. Owens**  
of Nishishinbashi 3 Mori Bldg. 4F, 1-4-10 Nishishinbashi, Minato-ku, Tokyo, Japan

state that the attached document is a true and complete translation to the best of my  
knowledge of the Reference No.02P00876.

Dated this 9 September, 2003.

Signature



**David H. Owens**

[Name of Document] Application for Patent  
[Reference Number] 02P00876  
[Filing Date] January 24, 2003  
[Addressee] Director General of the Patent Office  
[International Classification] G11B 5/738  
G11B 5/65  
G11B 5/84  
G11B 5/851  
H01F 10/30

[Title of the Invention] Magnetic Recording Medium and  
Manufacturing Method Thereof

[Number of Claims] 14

[Inventor]

[Address] c/o Fuji Electric Co., Ltd.  
1-1, Tanabeshinden, Kawasaki-ku,  
Kawasaki-shi, Kanagawa-ken

[Name] Tadaaki Oikawa

[Inventor]

[Address] c/o Fuji Electric Co., Ltd.  
1-1, Tanabeshinden, Kawaaki-ku,  
Kawasaki-shi, Kanagawa-ken

[Name] Takahiro Shimizu

[Inventor]

[Address] c/o Fuji Electric Co., Ltd.  
1-1, Tanabeshinden, Kawasaki-ku,  
Kawasaki-shi, Kanagawa-ken

[Name] Hiroyuki Uwazumi

[Inventor]

[Address] c/o Fuji Electric Co., Ltd.  
1-1, Tanabeshinden, Kawasaki-ku,  
Kawasaki-shi, Kanagawa-ken

[Name] Naoki Takizawa

[Applicant]

[ID Number] 000005234

[Name] Fuji Electric Co., Ltd.

[Attorney]

[ID Number] 100077481

[Patent Attorney]

[Name] Yoshikazu Tani

[Appointed Attorney]

[ID Number] 100088915

[Patent Attorney]

[Name] Kazuo Abe

[Fee]

[Deposit Account Number] 013424

[Amount of Deposit] 21,000 yen

[List of Documents Filed]

[Name of Document]	Specification	1
[Name of Document]	Drawings	1
[Name of Document]	Abstract	1

[Number of General Power of Attorney] 9707403

[Requirement of Proof] Required

[Document Title] Specification

[Title of the Invention] Magnetic Recording Medium and  
Manufacturing Method Thereof

[Claims]

[Claim 1] A magnetic recording medium in which at least a nonmagnetic foundation layer, a granular magnetic layer, a protective layer and a liquid lubricant layer are formed in this order on a nonmagnetic substrate;

the magnetic recording medium characterized in that said foundation layer has a body-centered cubic crystal structure with a preferred crystal orientation plane being a bcc (110) plane;

and characterized by having, between said foundation layer and said granular magnetic layer, a nonmagnetic intermediate layer that has a hexagonal close-packed structure with an hcp (100) plane or an hcp (200) plane being a preferred orientation plane.

[Claim 2] The magnetic recording medium according to claim 1, characterized in that said nonmagnetic intermediate layer is made of an alloy containing at least Ge and containing at least one selected from the group consisting of Fe and Mn.

[Claim 3] The magnetic recording medium according to claim 1, characterized in that said nonmagnetic intermediate layer is made of an alloy containing at least Co and containing at least one selected from the group consisting of W and Mo.

[Claim 4] The magnetic recording medium according to claim 1, characterized in that said nonmagnetic intermediate layer is made of an alloy containing at least Ti and containing at least

one selected from the group consisting of Pd, Ga and Al.

[Claim 5] The magnetic recording medium according to claim 1, characterized in that said nonmagnetic intermediate layer is made of an alloy containing at least Ni and containing at least one selected from the group consisting of Zr, Sn and In.

[Claim 6] The magnetic recording medium according to claim 1, characterized in that said nonmagnetic intermediate layer is made of an alloy of Fe and Sn.

[Claim 7] The magnetic recording medium according to claim 1, characterized in that said nonmagnetic intermediate layer is made of a compound containing at least one selected from the group consisting of carbides and nitrides of Co, Ni and Fe.

[Claim 8] The magnetic recording medium according to claim 1, characterized in that said nonmagnetic intermediate layer is made of an alloy having an Ni<sub>3</sub>Sn-type or AuCd-type regular lattice structure.

[Claim 9] The magnetic recording medium according to any of claims 1 through 8, characterized in that a crystal lattice misfit amount between said nonmagnetic intermediate layer and said granular magnetic layer is not more than 10% for each of an a-axis and a c-axis.

[Claim 10] The magnetic recording medium according to any of claims 1 through 9, characterized in that nonmagnetic grain boundaries in said granular magnetic layer comprise at least one<sup>1</sup>

---

<sup>1</sup> 'at least one' added - OK?

oxide of at least one element selected from the group consisting of Cr, Co, Si, Al, Ti, Ta, Hf and Zr.

[Claim 11] The magnetic recording medium according to any of claims 1 through 10, characterized in that ferromagnetic crystals in said granular magnetic layer are made of a CoPt alloy, and

the CoPt alloy has at least one element selected from the group consisting of Cr, Ni and Ta added thereto.

[Claim 12] The magnetic recording medium according to any of claims 1 through 11, characterized in that said foundation layer is made of any material selected from the group of metals consisting of Ta, Cr, W, Mo and V, the group of Cr alloys consisting of CrMo, CrTi, CrV and CrW, and the group of Ti alloys consisting of TiW, TiMo, TiCr and TiV each containing 10 to 60 at% of Ti.

[Claim 13] The magnetic recording medium according to any of claims 1 through 12, characterized in that said nonmagnetic substrate comprises a plastic resin.

[Claim 14] A method for manufacturing the magnetic recording medium according to any of claims 1 through 13, characterized by carrying out a film deposition process without heating said nonmagnetic substrate in advance.

[Detailed Description of the Invention]

[0001]

[Technical Field to which the Invention Pertains]

The present invention relates to a magnetic recording medium and a manufacturing method thereof, and more specifically to a magnetic recording medium and a manufacturing method thereof,

according to which an increase in coercivity and a reduction in noise are simultaneously realized, and moreover the manufacturing cost is low.

[0002]

[Prior Art]

From hitherto various magnetic layer compositions and structures, nonmagnetic foundation layer materials and so on have been studied and proposed for magnetic recording media, for which high recording density and low noise are demanded. In particular, in recent years, there have many proposals for 'granular magnetic layers', which are magnetic layers having a structure in which magnetic crystal grains are surrounded by a nonmagnetic nonmetallic substance such as an oxide or a nitride.

[0003]

For example, in Patent Document 1, it is proposed to form a nonmagnetic film, a ferromagnetic film and a nonmagnetic film in this order and then carry out heating treatment, thus forming a granular magnetic layer (recording layer) in which ferromagnetic crystal grains are dispersed in a nonmagnetic film, whereby noise can be reduced. An oxide or nitride of silicon or the like is used for the nonmagnetic films in this case.

[0004]

Moreover, Patent Document 2 describes depositing a recording layer by RF sputtering using a CoNiPt target to which an oxide such as SiO<sub>2</sub> has been added in advance, whereby a granular magnetic layer having a structure in which magnetic crystal grains are surrounded

by a nonmagnetic oxide and are separated from one another can be formed, and hence high coercivity ( $H_c$ ) and low noise can be realized.

[0005]

Moreover, in Patent Document 3, there is disclosed a granular magnetic layer that is constituted from an alloy having Co as a principal component thereof and having an hcp structure and 3 to 50 mol% of an oxide or nitride, and for which an axis of easy magnetization is oriented in a direction approximately parallel to the substrate surface, and it is stated that an increase in coercivity and a reduction in noise are possible with this granular magnetic layer.

[0006]

Furthermore, in Patent Document 4, an example is reported in which a recording layer is constituted from a granular magnetic layer in which a plurality of ferromagnetic crystal grains comprising an alloy having a composition such as  $\text{Co}_{80}\text{Pt}_{15}\text{Cr}_5$  are arranged in an  $\text{SiO}_2$  matrix, whereby a magnetic recording medium having good overwrite properties can be realized.

[0007]

With such granular magnetic layers, it is thought that a nonmagnetic nonmetallic grain boundary phase physically (spatially) separates the magnetic grains from one another, and hence the magnetic interaction between the magnetic grains is reduced, and thus the formation of zigzag magnetic domain walls occurring at recording bit transitional regions is suppressed,



whereby low noise can be obtained.

[0008]

With CoCr-type metallic magnetic films that have been used in the past, the deposition is carried out at high temperature, and hence the Cr precipitates out from the Co-based magnetic grains and becomes segregated at the grain boundaries, which reduces the magnetic interaction between the magnetic grains; however, in the case of a granular magnetic layer, a nonmagnetic nonmetallic substance is used as a grain boundary phase, and hence segregation occurs more easily than with the Cr in a conventional CoCr-type metallic magnetic film, and thus isolation of the magnetic grains from one another can be promoted relatively easily. Moreover, in a conventional CoCr-type metallic magnetic film, to secure sufficient Cr segregation, it is essential to set the substrate temperature to at least 200°C during the film deposition, whereas in the case of a granular magnetic layer, there is an advantage that the nonmagnetic nonmetallic substance can be made to segregate at the grain boundaries even in the case that the magnetic layer is deposited without heating the substrate.

[0009]

[Patent Document 1]

Japanese Patent Application Laid-open No. 8-255342

[0010]

[Patent Document 2]

U.S. Patent No. 5,679,473, specification

[0011]

[Patent Document 3]

Japanese Patent Application Laid-open No. 2001-101651

[0012]

[Patent Document 4]

Japanese Patent Application Laid-open No. 2000-276729

[0013]

[Patent Document 5]

Japanese Patent Application Laid-open No. 2002-015417

[0014]

[Problems to be Solved by the Invention]

However, with magnetic recording media having a granular magnetic layer, there is a problem in that to realize the desired magnetic properties (in particular high coercivity  $H_c$ ), it becomes necessary to add a relatively large amount of Pt, which is expensive, to the Co alloy. For example, with the magnetic recording medium described in above-mentioned Patent Document 2, to realize an  $H_c$  of approximately 2400 Oe, a large amount of Pt of 11 at% is necessary, whereas to realize approximately the same  $H_c$  with a conventional CoCr-type metallic magnetic film, adding at most 5 at% of Pt is sufficient. As the density of magnetic recording has increased in recent years, a very high  $H_c$  of 3000 Oe or more has come to be demanded of magnetic recording media, and in this situation there is a problem that with granular magnetic layers, for which a large amount of expensive Pt is required to increase the  $H_c$ , the manufacturing cost rises.

[0015]

Moreover, as the recording density is increased, further reductions in medium noise are demanded, and hence there is an increasing need to finely control the microstructure of granular magnetic layers, for example the magnetic crystal grain size and the segregation structure. For example, in Patent Document 5 it is disclosed that by forming a nonmagnetic intermediate layer of a nonmagnetic metal or alloy having an hcp crystal structure between a granular magnetic layer and a nonmagnetic foundation layer, it is possible to realize high  $H_c$  and low medium noise; however, to further reduce noise, crystal design on an atomic level, i.e. control of the state of orientation and the misfit amount of the crystal lattice between the respective layers, is considered to be necessary.

[0016]

In view of the problems described above, it is an object of the present invention to provide a magnetic recording medium and a manufacturing method thereof, according to which an increase in coercivity and a reduction in noise are simultaneously realized, and moreover the manufacturing cost is low.

[0017]

[Means for Solving the Problems]

In the present invention, to attain the above object, according to claim 1, in the case of a magnetic recording medium in which at least a nonmagnetic foundation layer, a granular magnetic layer, a protective layer and a liquid lubricant layer are formed in this order on a nonmagnetic substrate, the magnetic

recording medium is characterized in that the foundation layer has a body-centered cubic crystal structure with a preferred crystal orientation plane being a bcc (110) plane, and is characterized by having, between the foundation layer and the granular magnetic layer, a nonmagnetic intermediate layer that has a hexagonal close-packed structure with an hcp (100) plane or an hcp (200) plane being a preferred orientation plane.

[0018]

Moreover, according to claim 2, in the case of the magnetic recording medium according to claim 1, the magnetic recording medium is characterized in that the nonmagnetic intermediate layer is made of an alloy containing at least Ge and containing at least one selected from the group consisting of Fe and Mn.

[0019]

Moreover, according to claim 3, in the case of the magnetic recording medium according to claim 1, the magnetic recording medium is characterized in that the nonmagnetic intermediate layer is made of an alloy containing at least Co and containing at least one selected from the group consisting of W and Mo.

[0020]

Moreover, according to claim 4, in the case of the magnetic recording medium according to claim 1, the magnetic recording medium is characterized in that the nonmagnetic intermediate layer is made of an alloy containing at least Ti and containing at least one selected from the group consisting of Pd, Ga and Al.

[0021]

Moreover, according to claim 5, in the case of the magnetic recording medium according to claim 1, the magnetic recording medium is characterized in that the nonmagnetic intermediate layer is made of an alloy containing at least Ni and containing at least one selected from the group consisting of Zr, Sn and In.

[0022]

Moreover, according to claim 6, in the case of the magnetic recording medium according to claim 1, the magnetic recording medium is characterized in that the nonmagnetic intermediate layer is made of an alloy of Fe and Sn.

[0023]

Moreover, according to claim 7, in the case of the magnetic recording medium according to claim 1, the magnetic recording medium is characterized in that the nonmagnetic intermediate layer is made of a compound containing at least one selected from the group consisting of carbides and nitrides of Co, Ni and Fe.

[0024]

Moreover, according to claim 8, in the case of the magnetic recording medium according to claim 1, the magnetic recording medium is characterized in that the nonmagnetic intermediate layer is made of an alloy having an Ni<sub>3</sub>Sn-type or AuCd-type regular lattice structure.

[0025]

Moreover, according to claim 9, in the case of the magnetic recording medium according to any of claims 1 through 8, the magnetic recording medium is characterized in that a crystal

lattice misfit amount between the nonmagnetic intermediate layer and the granular magnetic layer is not more than 10% for each of an a-axis and a c-axis.

[0026]

Moreover, according to claim 10, in the case of the magnetic recording medium according to any of claims 1 through 9, the magnetic recording medium is characterized in that nonmagnetic grain boundaries in the granular magnetic layer comprise at least one<sup>2</sup> oxide of at least one element selected from the group consisting of Cr, Co, Si, Al, Ti, Ta, Hf and Zr.

[0027]

Moreover, according to claim 11, in the case of the magnetic recording medium according to any of claims 1 through 10, the magnetic recording medium is characterized in that ferromagnetic crystals in the granular magnetic layer are made of a CoPt alloy and the CoPt alloy has at least one element selected from the group consisting of Cr, Ni and Ta added thereto.

[0028]

Moreover, according to claim 12, in the case of the magnetic recording medium according to any of claims 1 through 11, the magnetic recording medium is characterized in that the foundation layer is made of any material selected from the group of metals consisting of Ta, Cr, W, Mo and V, the group of Cr alloys consisting of CrMo, CrTi, CrV and CrW, and the group of Ti alloys consisting

---

<sup>2</sup> 'at least one' added – OK?

of TiW, TiMo, TiCr and TiV each containing 10 to 60 at% of Ti.  
[0029]

Moreover, according to claim 13, in the case of the magnetic recording medium according to any of claims 1 through 12, the magnetic recording medium is characterized in that the nonmagnetic substrate comprises a plastic resin.

[0030]

Furthermore, according to claim 14, in the case of a method for manufacturing the magnetic recording medium according to any of claims 1 through 13, the method is characterized by carrying out a film deposition process without heating the nonmagnetic substrate in advance.

[0031]

[Embodiments of the Invention]

Following is a description of a perpendicular magnetic recording medium and a manufacturing method thereof according to the present invention, with reference to the drawings.

[0032]

The present inventors carried out assiduous studies to increase coercivity, reduce noise and reduce cost for granular magnetic layers, and as a result discovered that by providing, between a granular magnetic layer and a nonmagnetic foundation layer, a nonmagnetic intermediate layer comprising an alloy having a hexagonal close-packed (hcp) crystal structure, coercivity can be increased and noise can be reduced, without increasing the amount added of Pt, which is expensive. A similar idea is also disclosed

in Patent Document 5, but in the present invention the nonmagnetic intermediate layer is not constituted from an alloy containing an expensive precious metal such as Ru or Ir, but rather the nonmagnetic intermediate layer is constituted from an alloy containing a relatively inexpensive metal such as Ge, Co, Ti or Ni, and moreover crystal design of the nonmagnetic intermediate layer has been carried out while considering the state of orientation and the misfit amount of the crystal lattice between the nonmagnetic intermediate layer and the magnetic layer.

[0033]

Specific alloy compositions for the nonmagnetic intermediate layer will be described later; however, the nonmagnetic foundation layer in the magnetic recording medium of the present invention is preferentially orientated in the bcc (110) plane of a body-centered cubic (bcc) structure, and the nonmagnetic intermediate layer provided thereon is easily oriented in the hcp (100) plane or the hcp (200) plane. As a result, epitaxial growth of the granular magnetic layer on the nonmagnetic intermediate layer is promoted, and hcp (100) plane in-plane orientation becomes easy.

[0034]

Fig. 1 is a schematic sectional drawing of the magnetic recording medium of the present invention. This magnetic recording medium has a structure in which a nonmagnetic foundation layer 2, a nonmagnetic intermediate layer 3, a granular magnetic layer 4, and a protective layer 5 are formed in this order on a



nonmagnetic substrate 1, and a liquid lubricant layer 6 is formed on the protective layer 5.

[0035]

As the nonmagnetic substrate 1, a strengthened glass or an Al alloy plated with NiP, or a crystallized glass, or the like, as used with ordinary magnetic recording media can be used, or alternatively, because heating of the substrate is not necessary for reasons described later, a substrate made by injection molding a plastic resin such as a polycarbonate or a polyolefin can also be used.

[0036]

The nonmagnetic foundation layer 2 is constituted from a nonmagnetic body containing  $\text{NiAl}^3$ , Cr or the like that is preferentially oriented in the bcc (110) plane; it is preferable to use a metal such as Ta, Cr, W, Mo or V, a Cr alloy such as CrMo, CrTi, CrV or CrW, or a Ti alloy such as TiW, TiMo, TiCr or TiV containing 10 to 60 at% of Ti. In particular, to increase the effect of using the nonmagnetic intermediate layer 3 as described later, a TiW alloy or a TiMo alloy is preferable. Moreover, there are no particular limitations on the thickness of the foundation layer 2, but from the viewpoint of obtaining good recording/reproduction properties it is preferable to set this thickness to approximately 5 to 50 nm.

[0037]

---

<sup>3</sup> Please check.

The granular magnetic layer 4 comprises ferromagnetic crystal grains having an hcp structure and nonmagnetic grain boundaries surrounding these ferromagnetic crystal grains; a metal oxide or nitride is present at these nonmagnetic grain boundaries, thus spatially separating the ferromagnetic crystal grains from one another. Such a granular structure can be obtained, for example, by carrying out film deposition by sputtering using as a target a ferromagnetic metal containing an oxide for forming the nonmagnetic grain boundaries, or carrying out film deposition by reactive sputtering using a ferromagnetic metal as a target in Ar gas containing oxygen.

[0038]

There are no particular limitations on the material constituting the ferromagnetic crystal grains, but preferably a CoPt alloy is selected. In particular, from the viewpoint of reducing medium noise, it is preferable to add at least one element selected from the group consisting of Cr, Ni and Ta to the CoPt alloy.

[0039]

Moreover, to form a stable granular structure, as the material constituting the nonmagnetic grain boundaries, at least one<sup>4</sup> oxide of at least one element selected from the group consisting of Cr, Co, Si, Al, Ti, Ta, Hf and Zr is preferable. Furthermore, there are no particular limitations on the thickness of the magnetic

---

<sup>4</sup> 'at least one' added - OK?

layer, which should be set such that a sufficient head reproduction output can be obtained during recording/reproduction.

[0040]

For the protective layer 5, for example a thin film comprising mainly carbon can be used. Moreover, for the liquid lubricant layer 6, for example a perfluoropolyether lubricant can be used.

[0041]

The nonmagnetic intermediate layer 3 in the magnetic recording medium of the present invention must be made of an alloy (or metal) that has an hcp crystal structure and is preferentially oriented in the hcp (100) plane or the hcp (200) plane.

Specifically, the nonmagnetic intermediate layer 3 is preferably made of (1) an alloy containing at least Ge and containing at least one selected from the group consisting of Fe and Mn, (2) an alloy containing at least Co and containing at least one selected from the group consisting of W and Mo, (3) an alloy containing at least Ti and containing at least one selected from the group consisting of Pd, Ga and Al, (4) an alloy containing at least Ni and containing at least one selected from the group consisting of Zr, Sn and In, (5) an alloy of Fe and Sn, (6) at least one compound selected from the group consisting of carbides and nitrides of Co, Ni and Fe, or (7) an alloy having an  $\text{Ni}_3\text{Sn}$ -type ( $\text{DO}_{19}$ -type) or  $\text{AuCd}$ -type ( $\text{B19}$ -type) regular lattice structure.

[0042]

It is thought that the reason that the magnetic properties are improved by providing such a nonmagnetic intermediate layer

3 is that, because a nonmagnetic intermediate layer 3 having an hcp structure is present in advance as a foundation for the deposition of the granular magnetic layer 4, epitaxial growth of ferromagnetic crystals in the granular magnetic layer 4, which has an hcp structure, is promoted, and hence there is an effect of the crystallinity of the magnetic layer being increased, and moreover the initial state of growth of the magnetic layer is favorably controlled. There are no particular limitations on the thickness of the nonmagnetic intermediate layer 3, but approximately 1 to 50nm is suitable.

[0043]

Moreover, to further increase the degree of epitaxial growth and thus obtain yet better magnetic properties, it is preferable to set the crystal lattice misfit amount between the nonmagnetic intermediate layer 3 and the granular magnetic layer 4 as follows. Taking the a-axis and c-axis lattice constants of the nonmagnetic intermediate layer 3 to be  $a$  and  $c$  respectively, and taking the a-axis and c-axis lattice constants of the granular magnetic layer 4 to be  $a'$  and  $c'$  respectively, in the case that the a-axis lattice constant  $a$  satisfies  $a \leq 3\text{\AA}$ , an  $A$  value is taken as  $a$  ( $A = a$ ), whereas in the case that  $a > 3\text{\AA}$ , the  $A$  value is taken as  $a/2$  ( $A = a/2$ ), and moreover in the case that the c-axis lattice constant  $c$  satisfies  $c \leq 5\text{\AA}$ , a  $C$  value is taken as  $c$  ( $C = c$ ), whereas in the case that  $c > 5\text{\AA}$ , the  $C$  value is taken as  $c/2$  ( $C = c/2$ ); based on these values, the misfit amount (%) in the a-axis direction is defined as  $|(A-a')/A| \times 100$ , and the misfit amount (%) in the c-axis

direction is defined as  $| (C - c') / C | \times 100$ . Crystal design of the nonmagnetic intermediate layer 3 is then carried out such that each of these misfit amounts is not more than 10%.

[0044]

When manufacturing such a magnetic recording medium as shown in Fig. 1, even if a substrate heating step, which is essential in a conventional magnetic recording medium manufacturing process, is omitted, an increase in Hc and a reduction in medium noise can be achieved, and hence accompanying the simplification of the manufacturing process, it becomes possible to reduce the manufacturing cost.

[0045]

The present invention will now be described in more detail through examples.

(Examples)

Using an injection molded polycarbonate substrate (3.5" disk shape) as a nonmagnetic substrate 1, this was washed and then put into a sputtering apparatus, and then a foundation layer 2 of composition Cr-20at%Mo was formed to a thickness of 15nm under an Ar gas pressure of 5 mTorr. On the foundation layer 2 was deposited a nonmagnetic intermediate layer 3 having any of various compositions, in each case to a thickness of 30 nm under an Ar gas pressure of 5 mTorr.

[0046]

Next, a granular magnetic layer 4 was deposited to a thickness of 20 nm by RF sputtering under an Ar gas pressure of 5 mTorr using

a  $\text{CoCr}_{12}\text{Pt}_{12}$  target to which 10 mol% of  $\text{SiO}_2$  had been added, and then a carbon protective layer 5 was formed to a thickness of 10 nm, after which the magnetic recording medium was removed from the sputtering apparatus, and then a liquid lubricant layer 6 was applied on to a thickness of 1.5 nm, thus producing a magnetic recording medium having a structure as shown in Fig. 1. Substrate heating was not carried out before the deposition of the various films described above.

[0047]

Moreover, for comparison, a magnetic recording medium having no nonmagnetic intermediate layer 3 (Comparative Example 1), and a magnetic recording medium having 70Ir30Cr, which is nonmagnetic and has an hcp structure, of thickness 20nm as the nonmagnetic intermediate layer 3 (Comparative Example 2) were also produced.

[0048]

Table 1 shows the composition and crystal structure of the nonmagnetic intermediate layer 3, and various magnetic properties, for each of the magnetic recording media.

[0049]

[Table 1]

	Intermediate layer composition	Crystal structure	Hc (Oe)	Brδ (Gμm)	Reproduction output (mVp-p)	Medium noise (μV)	SNR (dB)
Example 1	75Fe25Ge	hcp (D0 19)	3345	4	0.98	20.7	27.48
Example 2	75Co25W	hcp (D0 19)	3411	45	1.018	21.38	27.53
Example 3	75Ti25Pd	hcp (B19)	3446	44	0.992	20.85	27.53
Example 4	50Ni50In	hcp (D0 19)	3346	38	0.965	18.85	27.21
Example 5	75Fe25Sn	hcp (D0 19)	3321	46	1.025	22.05	27.33
Example 6	75Ni25N	hcp (D0 19)	3102	43	0.952	21.32	26.98
Example 7	66Fe34C	hcp (D0 19)	3122	41	0.923	20.49	27.05
Example 8	75Ti25Al	hcp (D0 19)	3255	42	0.943	20.89	27.13
Example 9	75In25Ni	hcp (D0 19)	3255	42	0.943	20.89	27.13

Comparative Example 1	No intermediate layer	-	1680	40	0.916	44.52	20.25
Comparative Example 2	70Ir30Cr	hcp	2765	42	0.932	25.81	24.13

[0050]

Here,  $H_c$  is the coercivity,  $Br\delta$  is the product of the film thickness and the residual magnetic flux density as measured using a VSM, and SNR is the signal-to-noise ratio. Moreover, the reproduction output is the reproduction output for an isolated reproduced waveform as measured with a spin stand tester using a GMR head, and the medium noise is the value measured at a linear recording density of 200 kFCI.

[0051]

For the magnetic recording medium not having a nonmagnetic intermediate layer 3 (Comparative Example 1),  $H_c$  was 1680 Oe and the SNR was 20.25 dB, whereas for the magnetic recording medium having 20 nm of 70Ir30Cr, which is nonmagnetic and has an hcp structure (Comparative Example 2),  $H_c$  was approximately 1000 Oe higher than for Comparative Example 1 at 2765 Oe, and the SNR value was approximately 4 dB higher than for Comparative Example 1 at 24.13 dB.

[0052]

Furthermore, for the magnetic recording media of the present invention having a nonmagnetic intermediate layer 3 having an hcp structure with a  $DO_{19}$ -type or  $B19$ -type regular lattice structure as the crystal structure (Examples 1 to 9), in each case a high  $H_c$  exceeding 3100 Oe and an SNR exceeding approximately 27 dB were

obtained, i.e. an improvement in properties of approximately 500 Oe for Hc and approximately 3 dB for the SNR compared with a conventionally used Ir-Cr alloy or the like was found.

[0053]

Table 2 shows, for each of the magnetic recording media of Examples 1 to 9, the composition of the nonmagnetic intermediate layer 3, and the results of calculating the misfit amount (%) between the lattice of the nonmagnetic intermediate layer 3 and the lattice of the granular magnetic layer 4 based on the a-axis and c-axis lattice constants (a and c) of the nonmagnetic intermediate layer 3.<sup>5</sup>

[0054]

[Table 2]<sup>6</sup>

	Intermediate layer composition	Intermediate layer					Misfit (%)	
		a(Å)	c(Å)	A(Å)	C(Å)	A/C	a-axis	c-axis
Example 1	75Fe25Ge	5.02	8.16	2.51	4.08	1.63	2.4	2.2
Example 2	75Co25W	5.12	4.12	2.56	4.12	1.61	0.4	1.2
Example 3	75Ti25Pd	5.49	8.96	2.74	4.48	1.64	6.2	7.0
Example 4	50Ni50In	5.25	4.36	2.62	4.35	1.66	1.9	4.2
Example 5	75Fe25Sn	5.46	4.36	2.73	4.36	1.60	5.9	4.4
Example 6	75Ni25N	4.67	4.34	2.34	4.34	1.85	9.8	4.0
Example 7	66Fe34C	2.75	4.35	2.75	4.35	1.58	6.6	4.2
Example 8	75Ti25Al	5.71	4.62	2.86	4.62	1.62	10.0	9.8
Example 9	75In25Ni	5.47	4.19	2.74	4.19	1.53	6.1	0.6

[0055]

Here, the original lattice constants of the nonmagnetic intermediate layer are larger than the lattice constants of the Co alloy granular magnetic layer; in the case that the a-axis

<sup>5</sup> This paragraph rewritten after inferring meaning – please check.

<sup>6</sup> 'A/C' in Table 2 appears to be an error for 'C/A'.



lattice constant  $a$  satisfies  $a \leq 3\text{\AA}$ , the  $A$  value is taken as  $a$  ( $A = a$ ), whereas in the case that  $a > 3\text{\AA}$ , the  $A$  value is taken as  $a/2$  ( $A = a/2$ ); in the case that the  $c$ -axis lattice constant  $c$  satisfies  $c \leq 5\text{\AA}$ , the  $C$  value is taken as  $c$  ( $C = c$ ), whereas in the case that  $c > 5\text{\AA}$ , the  $C$  value is taken as  $c/2$  ( $C = c/2$ ).

[0056]

Calculating  $C/A$  from the  $A$  value and  $C$  value determined in this way, it can be seen that for all of the magnetic recording media,  $C/A$  exhibited a value between 1.5 and 1.9, and moreover the lattice misfit amount with the granular magnetic layer was a very small value at not more than 10% for both of the  $a$ -axis and the  $c$ -axis.

[0057]

Fig. 2 shows the X-ray in-plane diffraction patterns as measured using radiation for a magnetic recording medium of the present invention having a W foundation layer and a 66Fe34C nonmagnetic intermediate layer. From the diffraction patterns, it can be seen that a W bcc (110) / 66Fe34C hcp (002) / magnetic layer Co alloy hcp (002) epitaxially grown layered structure has been formed. Note that the diffraction patterns were obtained by X-ray in-plane diffraction, and hence the hcp (002) plane corresponds to the hcp (100) plane in the conventional  $\theta$ - $2\theta$  measurement method.

[0058]

[Effects of the Invention]

As described above, in the case of the magnetic recording

medium of the present invention, the nonmagnetic foundation layer is made to have a body-centered cubic crystal structure with the preferred crystal orientation plane being the bcc (110) plane, and between this foundation layer and the granular magnetic layer there is provided a nonmagnetic intermediate layer that has a hexagonal close-packed structure with the hcp (100) plane or the hcp (200) being the preferred orientation plane, and furthermore the crystal lattice misfit amount between the nonmagnetic intermediate layer and the granular magnetic layer is made to be not more than 10% for each of the a-axis and the c-axis. As a result, it becomes possible to form a nonmagnetic intermediate layer from a relatively inexpensive material and reduce the amount of Pt in the magnetic layer composition when simultaneously realizing an increase in coercivity and a reduction in noise, and hence a large reduction in cost is possible. Moreover, substrate heating is no longer necessary when manufacturing the magnetic recording medium of the present invention, and hence it also becomes possible to use an inexpensive plastic for the substrate.

[0059]

In this way, according to the present invention, it becomes possible to provide a magnetic recording medium and a manufacturing method thereof, according to which an increase in coercivity and a reduction in noise are simultaneously realized, and moreover the manufacturing cost is low.

[Brief Description of the Drawings]

[Fig. 1]

A schematic sectional drawing of a magnetic recording medium of the present invention.

[Fig. 2]

A diagram showing the X-ray in-plane diffraction patterns for a magnetic recording medium of the present invention having a W foundation layer and a 66Fe34C nonmagnetic intermediate layer.

[Explanation of Reference Numerals]

- 1 Nonmagnetic substrate
- 2 Foundation layer
- 3 Nonmagnetic intermediate layer
- 4 Granular magnetic layer
- 5 Protective layer
- 6 Liquid lubricant layer

[Document Title] Abstract

[Abstract]

[Problem] To provide a magnetic recording medium and a manufacturing method thereof, according to which an increase in coercivity and a reduction in noise are simultaneously realized, and moreover the manufacturing cost is low.

[Means of Solution] A nonmagnetic foundation layer 2 is made to have a body-centered cubic crystal structure with a preferred crystal orientation plane being the bcc (110) plane, and between the foundation layer 2 and a granular magnetic layer 4 is provided a nonmagnetic intermediate layer 3 that has a hexagonal close-packed structure with the hcp (100) plane or the hcp (200) plane being the preferred orientation plane. Furthermore, the crystal lattice misfit amount between the nonmagnetic intermediate layer 3 and the granular magnetic layer 4 is made to be not more than 10% for each of an a-axis and a c-axis. As a result, epitaxial growth of ferromagnetic crystals in the granular magnetic layer 4, which has an hcp structure, is promoted, and hence the crystallinity of the magnetic layer is increased, and thus it becomes possible to simultaneously realize an increase in coercivity and a reduction in noise.

[Chosen Drawing] Fig. 1

Text in Drawings

Fig. 2

INTENSITY (COUNT)

2 $\theta$  (°)


【書類名】 図面  
【特許】 2003-016580 (15. 01. 24)

【受付日】 平15. 01. 24

頁: 1/ 2

【書類名】 図面

図1 Fig. 1

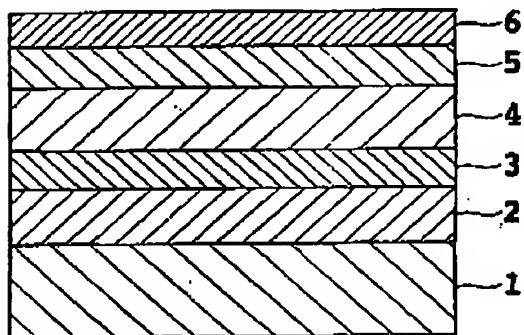


BEST AVAILABLE COPY

[書類名] 図面  
 [特許] 2003-016580 (15.01.24)

[受付日] 平15.01.24

頁: 2/ 2

[図2] Fig. 2

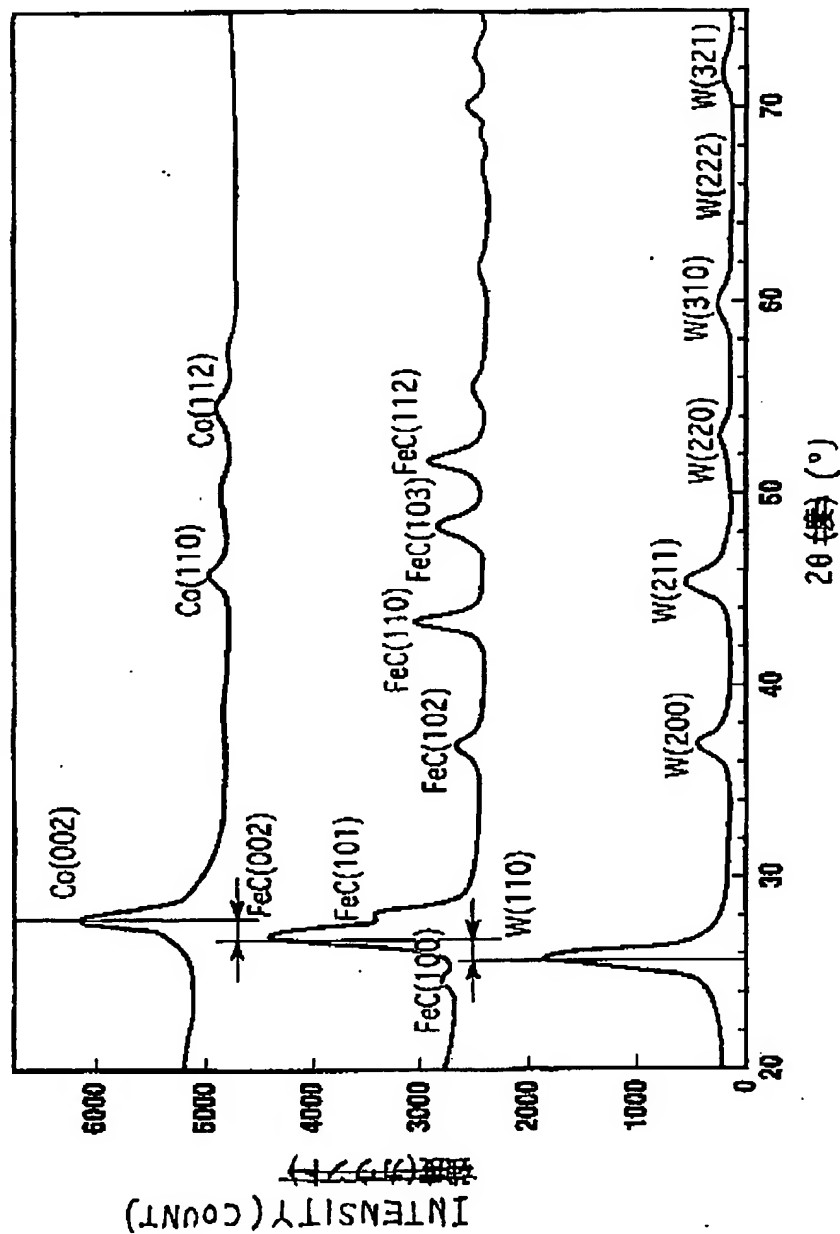

BEST AVAILABLE COPY